



2MP DUAL LIGHT FHD DOME CAMERA

PLC-332P-AU-DL3/PM

www.pollo.net.au

info@pollo.net.au



Sensor



Min.
illumination



BLC



Full-Color



Auto WB




Sync



AGC



IP67


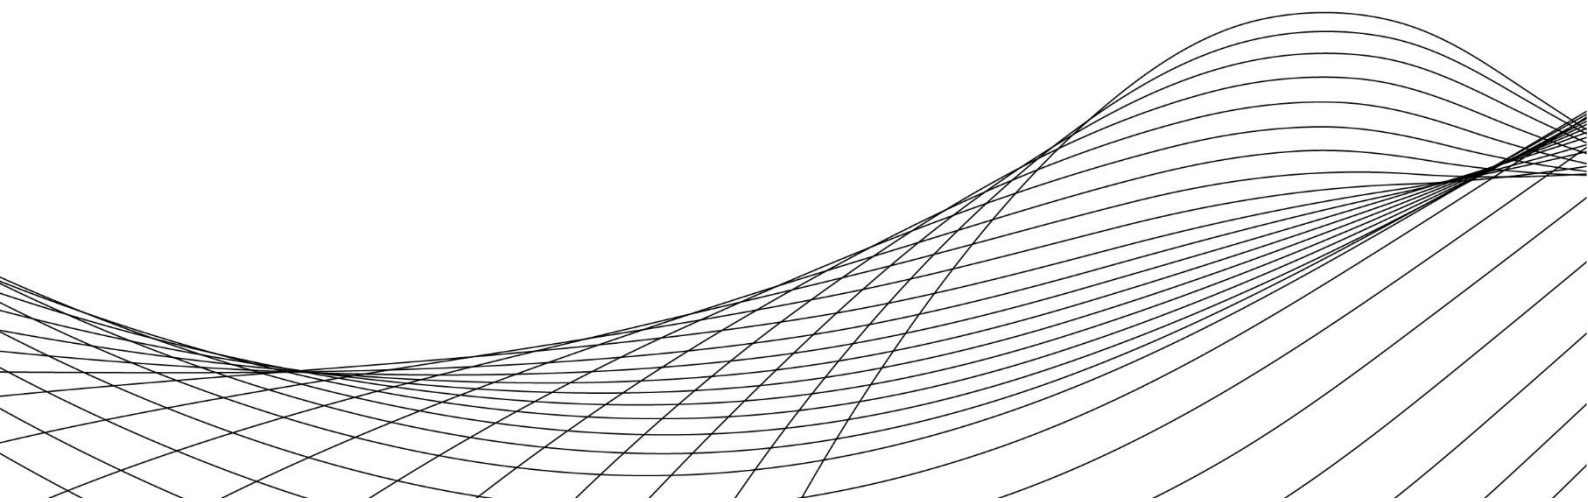


Key Features:

- ✔ 1080P real-time image, high resolution, true color
- ✔ AHD / TVI / CVI standard and lossless video output
- ✔ CMOS progressive scan, perfectly capturing the moving object
- ✔ Support OSD menu
- ✔ High speed, long distance and real time transmission
- ✔ 20 ~ 30m IR view distance; up to 30m white light view distance
- ✔ IP67 Ingress Protection
- ✔ Support COC
- ✔ Support coaxial audio transmission (Temporarily only valid in TVI signal mode)
- ✔ Support 960H CVBS output mode)



Dimensions:

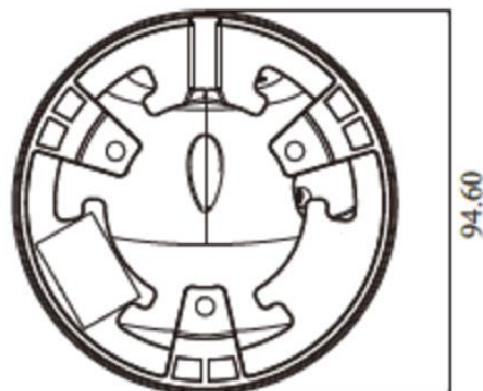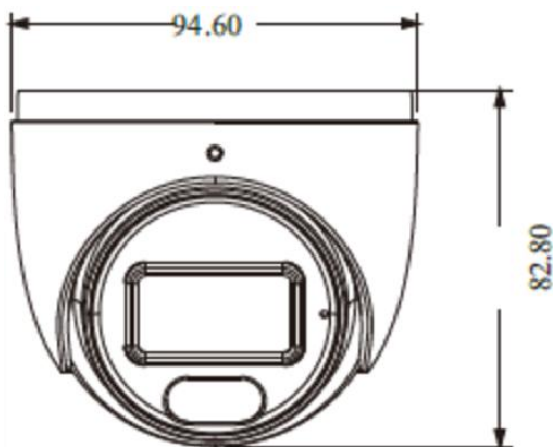

Specifications:

| | |
|------------------------------|---|
| Model | PLC-332P-AU-DL3/PM |
| Image Sensor | 1 / 3 "CMOS |
| Resolution | 2MP |
| Image Size | 1920 × 1080 |
| Video Output | AHD / TVI /CVI/CVBS |
| Audio | 1CH built-in MIC |
| Image System | PAL / NTSC |
| Electronic Shutter | Auto |
| View Distance | IR range: 20 ~30 m; White light range: up to 30m |
| Frame Rate | TVI:2MP@25/30fps AHD:2MP@25/30fps CVI:2MP@25/30fps CVBS:PAL/NSTC |
| Min. Illumination | 0.005lux @F1.2, AGC ON; 0 lux (LED ON) |
| Lens | 2.8 mm |
| Lens Mount | M12 |
| S / N Ratio | ≥52dB (AGC OFF) |
| Ingress Protection | IP 67 |
| Function Control | OSD (COC Control) |
| Digital WDR | Yes |
| Digital NR | Yes, 2D DNR(3D, only used with Pollo'S DVRs) |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| Contrast | Yes |
| Saturation/Color Gain | Yes |
| Sharpness | Yes |
| Coaxial audio | Yes |
| Image Setting | Yes |
| Defect Correction | Auto |
| Language | Chinese and English |
| Angle Adjustment | Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360° |
| Power Supply | DC12V (± 10%) |
| Power Consumption | LED OFF : < 1W; LED ON : < 4W |
| Working Environment | -10°C~40°C, 10%~90% (relative humidity) |
| Dimensions (mm) | 162.1×74.8×73.8 |
| Weight (Net) | Approx. 0.25KG |